


FTP Cat6 Patch cord, pink, 5 m

PP6-5M/RO

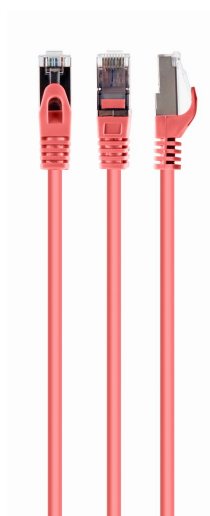

Features

- CAT6 AWG26 stranded foil shielded patch cord with moulded strain relief 50u" 8P8C plugs, 5m
- Snagless boots

Specifications

Category: category 6
 Type: FTP (foil shielded)
 Frequency bandwidth: Max. 250 MHz
 Compliance with ANSI / TIA / EIA-568B standards
 Conductor: AWG 26 (7 x 0.15 mm wire), CCA
 Conductor insulation: HDPE 0.86 mm
 Shielding: AL foil
 LDPE filler: yes
 Polyester tape: yes
 Drain wire: yes (7 x 0.12 mm CCA)
 Jacket material: PVC
 Jacket braiding: n/a
 Jacket outer diameter: 6.2 mm
 Length: conform item description
 Color: conform item description

Packaging

Q'ty in crtn, pcs
 Crtn volume, CUM
 Crtn weight, kgs
 Individual package size LxWxH:
 Carton size LxWxH:
 Country of origin
 Barcode
 Customs code

50
 0.034
 7.6
 40x140x140 mm
 400x300x280 mm
 CN
 8716309078016
 8544421000

Certificates

