


3DP-HIPS3-01-S

Filament, HIPSSilver, 3 mm, 1 kg

VERSATILE & EASY TO USE

- Practical liquid soluble HIPS material (High impact polystyrene) is a versatile, economical and impact-resistant support material.
- HIPS is soluble in Limonene and can be glued by acetone or superglue (Cyanoacrylate).
- Can be used as both standalone material and support material for over-lengths and holes in ABS parts.

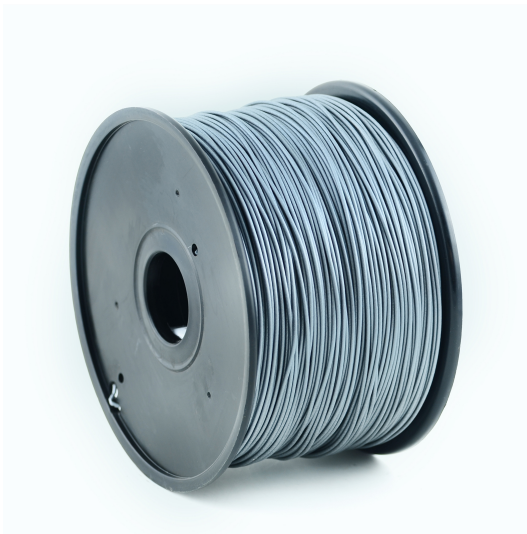

Features

- HIPS filament
- Maintains strength in high-impact applications
- Easily moldable, good dimensional stability and low volatility
- Suitable for use in a variety of 3D printers
- Can be easily glued and painted

Packaging

| | |
|--------------------------------|----------------|
| Q'ty in crtn, pcs | 12 |
| Crtn volume, CUM | 0.053 |
| Crtn weight, kgs | 16 |
| Individual package size LxWxH: | 180x180x110 mm |
| Carton size LxWxH: | 380x375x370 mm |
| Country of origin | CN |
| Barcode | 8716309089425 |
| Customs code | 3916909000 |

Specifications

Material: HIPS, 3 mm diameter
Weight: 1 kg/spool (2.2 lbs)
Length: approx. 140 m
Density at 21.5°C: 1.04 g/cm³
Melt Flow Index at 10min, 2.16kg: 4
Melt Point: 225 240 °C
Heat-Deflection-Temperature at 0.455 MPa: 7 °C
Yield Strength at 5mm/min: 80 90 MPa
Impact Strength: 10 KJ/m²
Elongation at Break: 55 %
Diameter: 3.00 ± 0.05 mm
Spool dimensions: 200 mm diameter x 67 mm height x 53 mm central hole

System requirements

A 3D printer with 3 mm extruder of temperature around 230 °C, suitable for HIPS filament
Do not remove 3D printed parts until they are fully cooled down

Certificates

