


Latiguillo FTP Cat.6A chaqueta LSZH, 0,25m

PP6A-LSZHCU-V-0.25M

- Perfect connection
- Dual shielded for a reliable connection
- Low Smoke Zero Halogen (LSZH) jacket
- Gold plated contacts

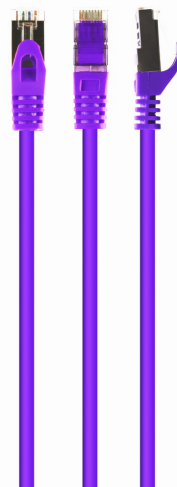

Especificaciones

Category: category 6A
Type: SFTP (dual shielded)
Frequency bandwidth: Max. 500 MHz
Compliance with ANSI / TIA / EIA-568B standards
Conductor: AWG 27 (7 x 0.135 mm wire), CU
Conductor insulation: FM-PE 1.0 mm
Shielding: AL foil + braid shield (16 x 4/0.12 mm)
LDPE filler: yes
Polyester tape: yes
Drain wire: n/a
Jacket material: LSZH
Jacket braiding: n/a
Jacket outer diameter: 6.2 mm
Length: conform item description
Color: conform item description

Características

- Conexión perfecta
- Foil blindado una conexión más fiable
- Chaqueta Smoke Zero Halogen Low (LSZH)
- Contactos chapados en oro

Embalaje

Cantidad por caja, pcs	500
Volumen caja, M3	0.041
Peso caja, kgs	10.5
Medidas cajas individuales LxWxH:	130x10x175 mm
Medidas caja LxWxH	400x300x340 mm
País de origen	CN
Código de barras	8716309091374
codigo de aduanas	8544421000

Certificados

