


size: 95x160 mm



Pantone 116C



C70M50Y50K100

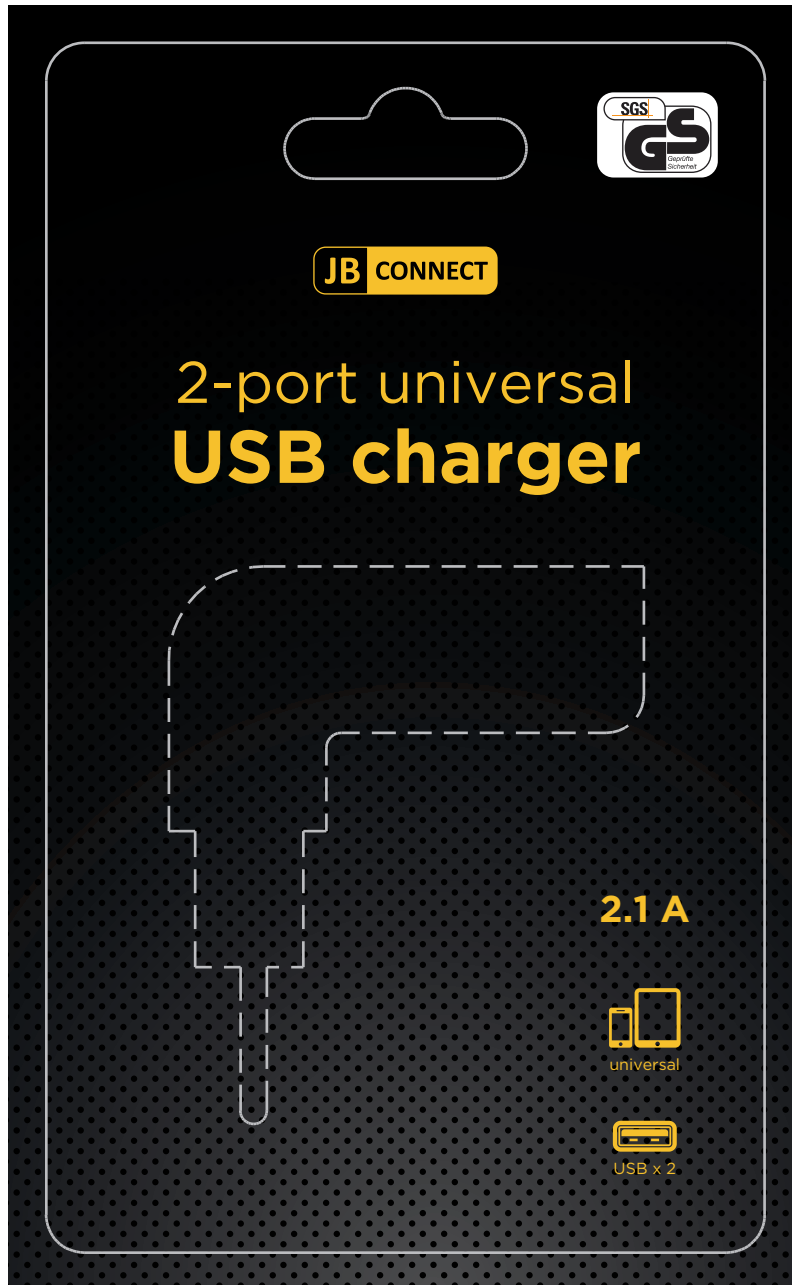

All brands and logos are registered trademarks of their respective owners.

**NL**

Universele 2-poorts USB-adapterstekker (5 V / 2.1 A)  
Steek de adapterstekker in het stopcontact om eenvoudig uw  
USB-apparaten op te laden

**FR**

Chargeur universel, 5 V / 2.1 A  
Brancher et charger simplement vos appareils

**EN**

Universal 2-port AC USB charging adapter, 5 V / 2.1 A  
Just plug it into the wall socket to charge your USB-rechargeable  
device

**DE**

Universal 2-fach AC USB Ladegerät, 5 V / 2.1 A  
Das Netzteil einfach in die Steckdose stecken um das  
wiederaufladbare USB Gerät zu laden

**Specifications**

Input voltage: 100 V - 240 V ~, 50 Hz / 60 Hz

Output voltage: 5 V DC

Output current: up to 2.1 A

Standby power consumption: 0.2 W

Short circuit protection overload

current protection

Working temperature: up to

40 degrees Celsius



www.jb-connect.nl | helpdesk@jb-connect.nl  
1358 CD, Almere, The Netherlands | 0900 - 4362473 (gratis in NL)