




A

B

C

D

ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	2007.4.28

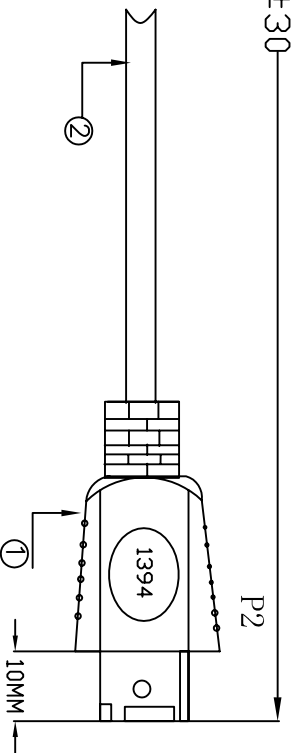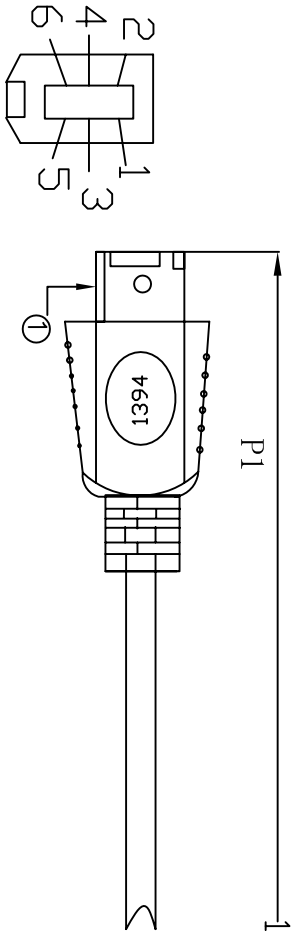

Connection

P1		P2	
1	Red	1	
2	White	2	
3	Green	5	
4	Black	6	
5	Blue	3	
6	Yellow	4	
Shell	Braiding	Shell	

Cable spec:
30AWG/4C(Cu)+28AWG/2C Cu+AL+B

Diagram showing a cross-section of a cable connector. The diagram includes a cross-section view of the cable and a side view of the connector housing. Labels include: 芯线 (Core wire), 外皮 (Outer jacket), 导体 (Conductor), 铝箔 (Aluminum foil), 编织 (Braiding), and $\varnothing 4.5 \pm 0.15$.

3

2

1

ITEM	DESCRIPTION	QTY	UNIT	ITEM	DESCRIPTION	QTY	UNIT
②	①D: 4.5mm Balck	1.8	M				
①	1394 6P Connector	2	SET				

A

B

C

D

3

2

1

DWG

date

CHK

date

APP

date

UNIT: MM

TITLE: 1394 6P/6P L: 1.8M

P/N: FWP-66-6

TOLERANCE: WHOLE NO ± 0.5 ANGLE $\pm 0.5^\circ$

EDITION: 1

SCAL: NONE

DWG NO:

CUSTOMER:

Gembird Electronics Ltd

SH 1	QF 2	A4
------	------	----